

# ENGINE OILS

## **HiTEC<sup>®</sup> 8712**

**HDDO Additive Package**



A Cost Optimised Package for Euro 0-II Trucks

## HiTEC® 8712 HDDO Additive Package

A Cost Optimised Package for Euro 0 - II Trucks

### Key Performance Benefits

HiTEC® 8712 HDD additive has been designed to address the need of older vehicles (Euro 0 - II) which still represent a significant share in emerging countries and where good value for performance remains a key driver for end users.

HiTEC® 8712 is formulated with the additional TBN reserve required to cope with fuel severity in some countries and delivers excellent protection against corrosion and soot.

HiTEC® 8712 provides a number of customer benefits:

- Cost effective solution for older trucks (Euro 0 - II)
- Competitive treat-rate for API CF-4
- Formulated to cope with severe fuel quality
- High 10 TBN reserve
- Excellent protection against corrosion and soot

### Recommended Dosage

The recommended dosage of HiTEC® 8712 is 6.2% wt. to meet API CF-4 specification requirements.


### Typical Characteristics

Appearance:	Dark brown viscous liquid
Specific Gravity at 15.6/15.6°C:	1.036
Flash Point, °C (PMCC):	135 min.
Viscosity at 100°C, cSt:	95

### Handling Information

Max Handling Temp: 70°C  
 Shelf Life: 3 months at 50°C  
 36 months at ambient temperature

### HiTEC® 8712 Offers Excellent Protection Against Corrosion

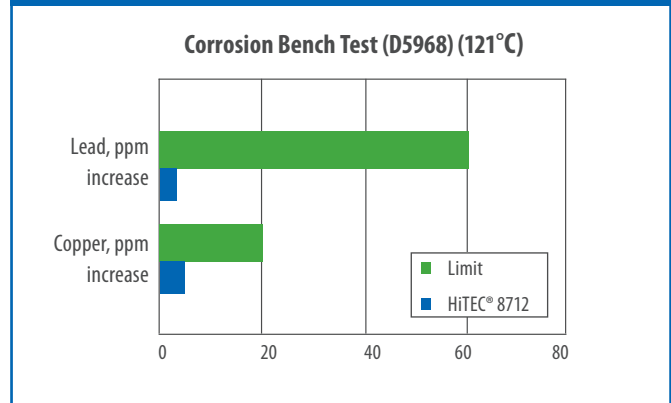

### HiTEC® 8712 Demonstrates Excellent Soot Control

