

ENGINE OILS

HiTEC[®] 8766B

HDDO Additive Package



Bespoke stand-alone additive designed for ACEA E7

HiTEC® 8766B HDDO Additive Package

Bespoke stand-alone additive designed for ACEA E7

Key Performance Benefits

HiTEC® 8766B HDDO has been designed with Western European needs in mind where ACEA E7 requirements are dominating.

HiTEC® 8766B provides a number of customer benefits:

- Ultimate logistics rationalisation with NO booster for API CI-4 or API CH-4
- Base oil flexibility with Group I and Group II coverage
- Lowest DI+VII treat-rate for ACEA E7-08 issue 2 (ACEA 2010)
- Optimum soot handling and VII credit
- Outstanding performance benefits, as demonstrated in Mack T8E, Mack T12, Sequence IIF and Volvo D12D engine tests

Typical Characteristics

	HiTEC® 8766B	HiTEC® 8767B
Density at 15°C, g/ml	0.969	0.918
Flash Point, °C (PMCC)	135 min.	135 min.
Kinematic Viscosity at 100°C, mm²/s	140	187
Total Base Number, mg KOH/g	74	38

Handling Information


Max Handling Temp: 70 °C

Shelf Life: 24 months at ambient temperature

Recommended Dosage

HiTEC® 8766B	HiTEC® 8767B	Approvals																					
12.7%	3.3%	●	●	●	●			●	●	●													SAE 10W-40
14.0%	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	SAE 15W-40
12.7%	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	SAE 15W-40

● MB package approval ● Requires 0.3% C300 TBN Boost ● Group I/III base oil mix ● Group I or Group II base oil ● Group II base oil only

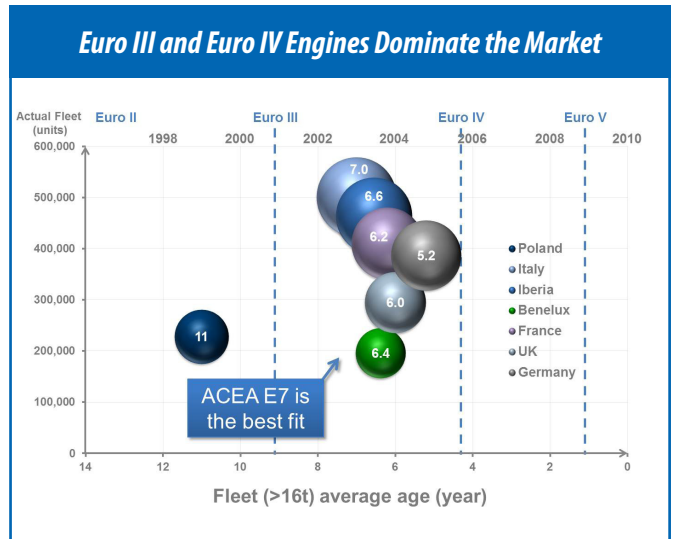

HiTEC® 8766B

Take another look