




Trigonox[®] 29-40B-pd

Product description

1,1-Di(tert-butylperoxy)-3,3,5-trimethylcyclohexane, powder
40% on calcium carbonate and silica

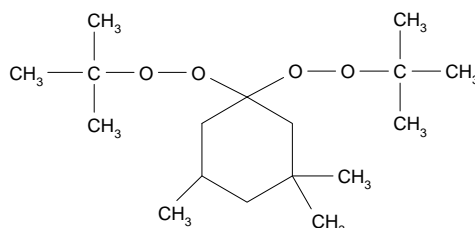

Molecular weight	: 302.5
Active oxygen content peroxide	: 10.58%
actual product	: 4.13-4.34%
CAS No.	: 6731-36-8
EINECS/ELINCS No.	: 229-782-3
TSCA status	: listed on inventory

Trigonox 29-40B-pd is a peroxide formulation which is used for the crosslinking of natural and synthetic rubbers, as well as thermoplastic polyolefins.

Specifications

Appearance	: Off-white powder
Assay	: 39.0-41.0%

Storage

Due to the relatively unstable nature of organic peroxides a loss of quality can be detected over a period of time. To minimize the loss of quality, AkzoNobel recommends a maximum storage temperature (T_s max.) for each organic peroxide product.

For *Trigonox* 29-40B-pd T_s max. = 30°C

When stored under the recommended storage conditions, *Trigonox* 29-40B-pd will remain within the AkzoNobel specifications for a period of at least six months after delivery.

Thermal stability

Organic peroxides are thermally unstable substances, which may undergo self-accelerating decomposition. The lowest temperature at which self-accelerating decomposition of a substance in the original packaging may occur is the Self-Accelerating Decomposition Temperature (SADT). The SADT is determined on the basis of the Heat Accumulation Storage Test.

For *Trigonox* 29-40B-pd SADT : 60°C

The Heat Accumulation Storage Test is a recognized test method for the determination of the SADT of organic peroxides (see Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria - United Nations, New York and Geneva).

Major decomposition products

Methane, Acetone, tert-Butanol, 3,3,5-Trimethylcyclohexane, 3,3,5-Trimethylhexanoic acid, Poly(3,3,5-trimethyl ϵ -caprolacton)

Packaging and transport

The standard packaging is a cardboard box for 20 kg peroxide formulation.

Both packaging and transport meet the international regulations. For the availability of other packed quantities consult your AkzoNobel representative.

Trigonox 29-40B-pd is classified as Organic peroxide type F; solid, Division 5.2; UN 3110.

Safety and handling

Keep containers tightly closed. Store and handle *Trigonox* 29-40B-pd in a dry well-ventilated place away from sources of heat or ignition and direct sunlight. Never weigh out in the storage room.

Avoid contact with reducing agents (e.g. amines), acids, alkalines and heavy metal compounds (e.g. accelerators, driers and metal soaps).

Please refer to the Material Safety Data Sheet (MSDS) for further information on the safe storage, use and handling of *Trigonox* 29-40B-pd. This information should be thoroughly reviewed prior to acceptance of this product.

The MSDS is available at www.akzonobel.com/polymer.

Applications

Trigonox 29-40B-pd is used for the crosslinking of natural and synthetic rubbers, as well as thermoplastic polyolefins.

- Rubber compounds containing *Trigonox* 29-40B-pd have excellent scorch safety.
- Safe processing temperature: 115°C (rheometer t_{s2} > 20 minutes).
- Typical crosslinking temperature: 145°C (rheometer t_{90} about 12 minutes).

Trigonox is a registered trademark of Akzo Nobel Chemicals B.V. or affiliates in one or more territories.

All information concerning this product and/or suggestions for handling and use contained herein are offered in good faith and are believed to be reliable. AkzoNobel Functional Chemicals, however, makes no warranty as to accuracy and/or sufficiency of such information and/or suggestions, as to the product's merchantability or fitness for any particular purpose, or that any suggested use will not infringe any patent. Nothing contained herein shall be construed as granting or extending any license under any patent. Buyer must determine for himself, by preliminary tests or otherwise, the suitability of this product for his purposes. The information contained herein supersedes all previously issued bulletins on the subject matter covered. The user may forward, distribute, and/or photocopy this document only if unaltered and complete, including all of its headers and footers, and should refrain from any unauthorized use. You may not copy this document to a website.

Akzo Nobel Polymer Chemicals B.V.
Amersfoort, The Netherlands
T +31 33 467 6767
F +31 33 467 6151

E polymerchemicals.nl@akzonobel.com

Akzo Nobel Polymer Chemicals LLC
Chicago, U.S.A.
T +1 312 544 7000
1 800 828 7929 (Toll free US only)
F +1 312 544 7188
E polymerchemicals.na@akzonobel.com

Akzo Nobel (Asia) Co., Ltd.
Shanghai, PR China
T +86 21 2216 3600
F +86 21 3360 7739

E polymerchemicals.ap@akzonobel.com

www.akzonobel.com/polymer