

VISCOPLEX® 14-402

A Flow Improver for Mineral Oil-Based Fuels

Function

Cold flow improver and pour point depressant for heavy fuel oils, marine diesel fuel and crude oil.

Performance

VISCOPLEX® 14-402 improves the cold flow properties of heavy fuel oils, marine diesel fuel or crude oils.

This product has been especially developed to enhance the compatibility when mixed with small quantities of water or aromatic solvents.

Composition

VISCOPLEX® 14-402 is a polymer dissolved in a solvent-refined neutral oil.

Physical Data

Table 1 lists representative physical properties. (These do not constitute specifications.)

Table 1 Typical Physical Properties of VISCOPLEX® 14-402

| | |
|--|--------|
| Visual Appearance | Turbid |
| Viscosity, mm ² /s (ASTM D445) | |
| at 40 °C | 530 |
| at 100 °C | 75 |
| Density at 15 °C, g/cm ³ (ASTM D4052) | 0.89 |
| Flash Point, °C (ASTM D3278) | >100 |

Density

The typical density of VISCOPLEX® 14-402, as a function of temperature, is given in Figure 1.

Bulk Viscosity

The typical bulk viscosity of VISCOPLEX® 14-402, as a function of temperature, is given in Figure 2.

Additional Information

For additional information on product availability, performance data and Material Safety Data Sheets, please contact your Account Manager or Customer Service Representative.

For an overview of our entire VISCOPLEX® and VISCODASE® product range and complete information on handling and storage, please visit the Products & Applications section on our website evonik.com/oil-additives.

Figure 1 Density vs. Temperature


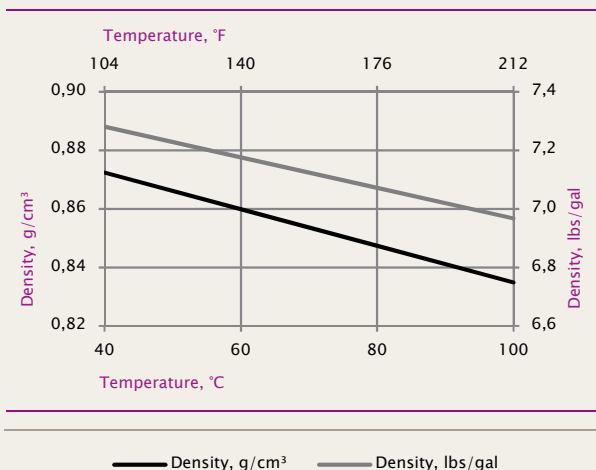


Figure 2 Kinematic Viscosity vs. Temperature

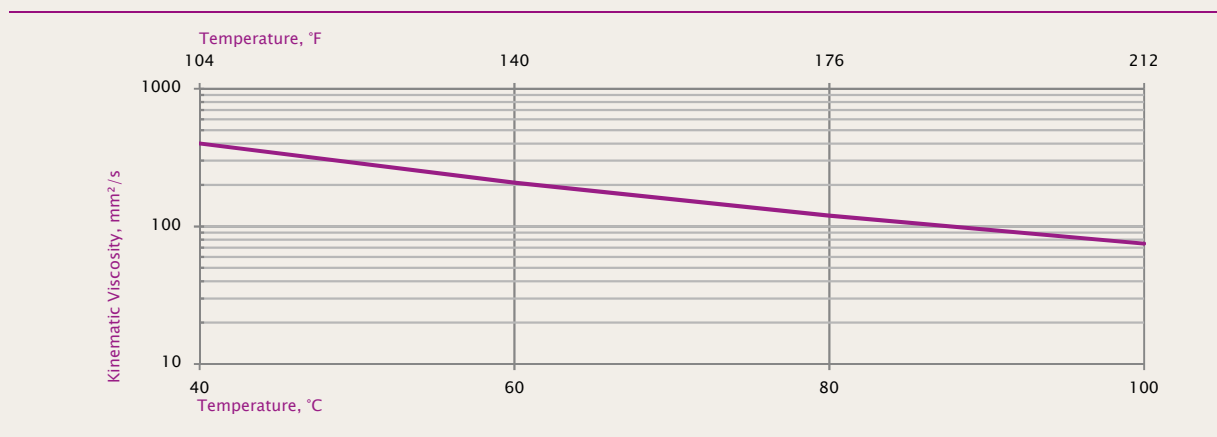

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

VISCOPLEX®, VISCODASE®, DYNAVIS®, DRIVON™ and NUFLUX™ are registered trademarks of Evonik Industries AG or one of its subsidiaries.

August 2017

Europe, Africa, Mideast:

Evonik Resource Efficiency GmbH, Kirschenallee, 64293 Darmstadt, Germany, Telephone: +49 6151 1809

Americas:

Evonik Oil Additives USA, Inc., 723 Electronic Drive, Horsham, Pennsylvania 19044-4050, Telephone: +1 215 706 5800, TOLL-FREE: 1 888 876 4629

Asia Pacific:

Evonik Oil Additives Asia Pacific Pte. Ltd., 3 International Business Park 07-18 Nordic European Centre, Singapore 609927, Telephone: +65 6809 6571

oil-additives@evonik.com, Evonik.com/oil-additives